

Smuffo

Dehumidifier Portable

R134a



Features

- Available in 3 sizes of different capacities
- Modern look and casing in plastic material
- Easy to move from one room to another with 4 rotating wheels
- Relative humidity setting between 80% and 35%
- Visual display of the humidity setting and that read in the room
- Possibility to set continuous operation for operation at maximum dehumidification capacity
- 3 fan speed settings
- Easy and immediate use unit mounted control panel
- Delay timer for starting/stopping (2h, 4h)
- Possibility to discharge the condensate into the bucket mounted in the unit or to externally drain directly through the outlet pipe on the side of the unit
- If the condensate collection bucket is full the dehumidifier will stop and light up the relative indicator
- Indicator lights to show the requirement to clean the filter
- Automatic defrost
- Easy of the filter and the condensate collection bucket cleaning and maintenance
- Auto-diagnostic Function
- Auto-Restart Function

Technical data

Mod		DMK12	DMK20	DMK24
Dehumidification capacity ¹	[l/24h]	12	20	24
Sound pressure level (max/med/min)	[dB(A)]	43/41/39	45/43/41	47/45/43
Air flow rate (max/med/min)	[m ³ /h]	150/120/100	150/130/115	190/170/145
Condensate bucket collection capacity	[l]	4.9	4.9	4.9
Power input ¹	[W]	250	380	390
Current input ¹	[A]	1.1	1.7	1.7
Nominal power input ²	[W]	330	480	500
Refrigerant		R134a	R134a	R134a
Refrigerant charge	[kg]	0.09	0.20	0.24


Power supply = 230V ~ 50Hz

Sound pressure measured in a semi anechoic chamber, 1m from the front

¹ Indoor air temperature 30°C d.b. ; 27°C w.b.

² Tested according to EN-60335

Dimensions (mm)

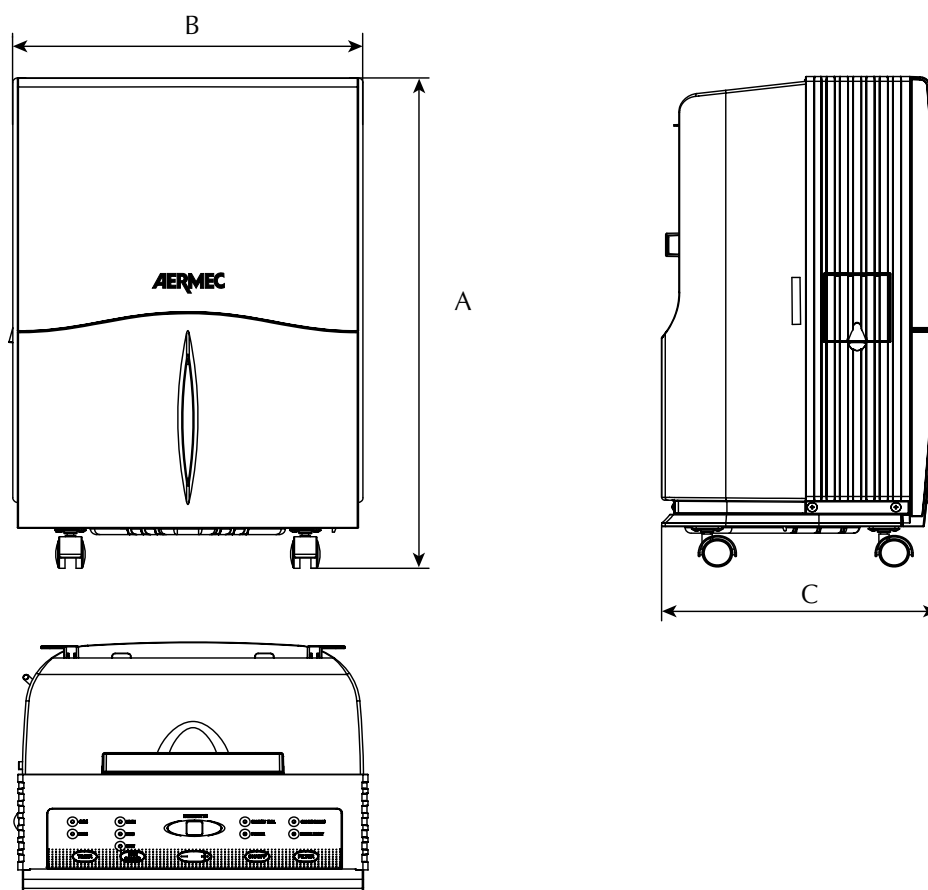

		DMK12	DMK20	DMK24
Height	A	523	523	523
Width	B	343	343	343
Depth	C	270	270	270
Weight	[kg]	12.5	14.5	15